


LED
Downlight

RECESSED DOWNLIGHT

Sleek Integrated LED Recessed Downlight with Built-in Driver

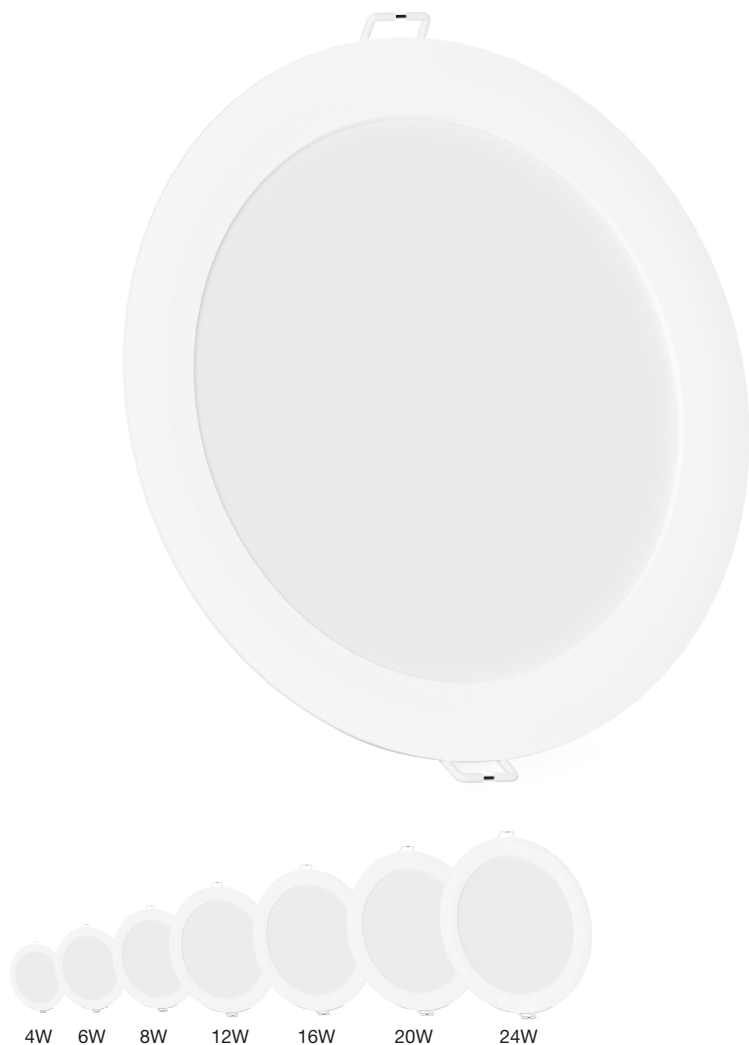

Energy Class: **G**

Order Code	Wattage	CCT	Lumen	Dimensions (A x B mm)	Cut Out Range (mm)	Qty/CTN
10708	4W	4000K	300lm	ø90x33	ø(70-80)	40
10715	4W	6500K	300lm	ø90x33	ø(70-80)	40

Energy Class: **F**

Order Code	Wattage	CCT	Lumen	Dimensions (A x B mm)	Cut Out Range (mm)	Qty/CTN
10739	6W	6500K	550lm	ø105x36	ø(85-95)	40
10746	8W	4000K	750lm	ø115x33	ø(95-105)	40
10753	8W	6500K	750lm	ø115x33	ø(95-105)	40
10760	12W	4000K	1150lm	ø140x38	ø(120-130)	40
10777	12W	6500K	1150lm	ø140x38	ø(120-130)	40
10784	16W	4000K	1600lm	ø165x38	ø(145-155)	30
10807	20W	4000K	2150lm	ø190x38	ø(170-180)	30
10814	20W	6500K	2150lm	ø190x38	ø(170-180)	30
10821	24W	4000K	2450lm	ø215x38	ø(195-205)	30
10838	24W	6500K	2450lm	ø215x38	ø(195-205)	30

25000 Hours	100° Beam Angle
Non Dimmable	80 CRI
3 YEAR Warranty	IP20


Specification

Voltage 220-240V~
50/60Hz

Ambient Temp -20°C to 45°C

Colour Temp

4000K 6500K

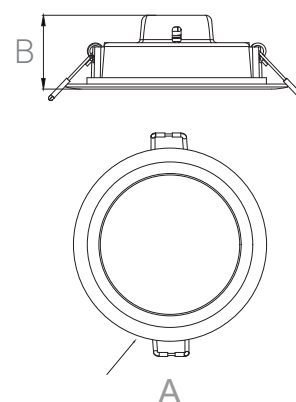

CE UK
CA Class II